


Item no. 87535300

Connector type FM-FM

Frequency Range	0.3 - 3000 MHz
Impedance (Nom.)	75 Ω
Amp. Rating (measured)	5,5 A @10°C increase
	(calculated) 7,5 A @20°C increase
Transfer Impedance (CoMeT)	<0,9 mΩ/m @ 5-30MHz
	<0,03 mΩ/item @ 5-30MHz
Shielding Effectiveness (CoMeT)	>135 dB @ 30-1000MHz
	>135 dB @ 1000-3000MHz

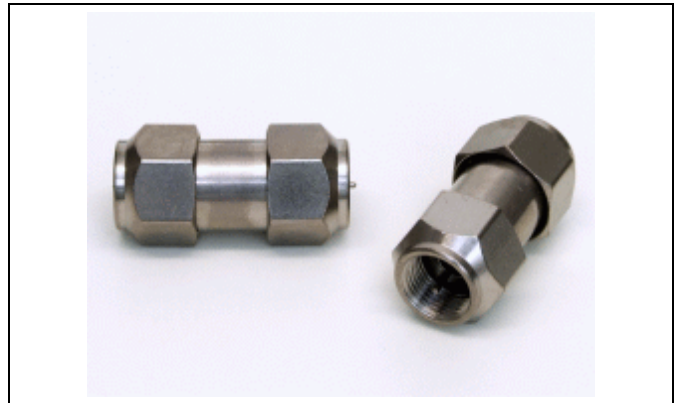

All tests performed using instruments calibrated in accordance to our ISO 9001 certification. Further technical specifications and installation instructions can be obtained on request.

Return Loss (IEC 61169-1)
(Rhode und Schwarz ZVB-8)

	Better than	Typical
0.3 - 500 MHz	-38 dB	-41,1 dB
500 - 860 MHz	-34 dB	-36,6 dB
860 - 1000 MHz	-33 dB	-35,6 dB
1000 - 1750 MHz	-27 dB	-29,8 dB
1750 - 2150 MHz	-25 dB	-27,7 dB
2150 - 3000 MHz	-22 dB	-25,4 dB

Insertion Loss Max.

	Better than	Typical
0.3 - 500 MHz	-0,06 dB	-0,01 dB
500 - 860 MHz	-0,07 dB	-0,02 dB
860 - 1000 MHz	-0,07 dB	-0,02 dB
1000 - 1750 MHz	-0,09 dB	-0,04 dB
1750 - 2150 MHz	-0,09 dB	-0,04 dB
2150 - 3000 MHz	-0,09 dB	-0,04 dB

Temperature

Installing	-5° to +50° C
Operating	-40° to +70° C
Storing	-40° to +70° C

Intermodulation

3rd Order (@2x0,5W)	IM3 -147 dBc	IP3-value +100 dBm
---------------------	---------------------	---------------------------

Inner Conductor Resistance

@ 1 A DC	2,2 mΩ
----------	--------

Sealing Test

(IEC IP-code)	IP X7 1 meter / 30 minutes
---------------	----------------------------

Insulation Resistance

@ 500 VDC	>200 GΩ
-----------	---------

O-rings

-

Dielectric Strength

DC Test Voltage	3,0 KV
-----------------	--------

Base Material

Body Parts	Brass CuZn39Pb3
Inner Conductor	Brass CuZn39Pb3

Plating

Body Parts	Nitin-6
Inner Conductor	Nitin-6

Insulators

PE

Test performed by

Sven-Erik Sandberg

Date of release

May 27, 2010

Remarks

ISO 9001:2000 / ISO 14001 certified

Distributor: