


Item no.

Frequency Range
Impedance (Nom.)
 (calculated)

Product photo

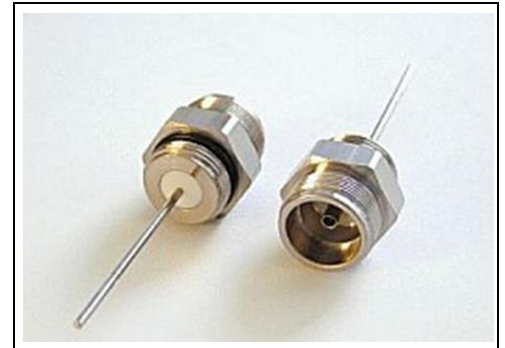

Transfer Impedance (CoMeT)

Screening Attenuation(CoMeT)

Return Loss	Better than	Typical
0.3 - 500 MHz	-39 dB	-42.6 dB
500 - 860 MHz	-37 dB	-40.0 dB
860 - 1000 MHz	-35 dB	-37.7 dB
1000 - 1750 MHz	-30 dB	-32.7 dB
1750 - 2150 MHz	-25 dB	-28.2 dB
2150 - 3000 MHz	-25 dB	-28.2 dB

Insertion Loss Max.	Better than	Typical
0.3 - 500 MHz	-0.11 dB	-0.06 dB
500 - 860 MHz	-0.14 dB	-0.09 dB
860 - 1000 MHz	-0.15 dB	-0.10 dB
1000 - 1750 MHz	-0.19 dB	-0.14 dB
1750 - 2150 MHz	-0.22 dB	-0.17 dB
2150 - 3000 MHz	-0.26 dB	-0.21 dB

Temperature
Installing
Operating
Storing

Intermodulation
3rd Order (@2x1W)

Inner Conductor Resistance
 (@ 1 A DC)

Sealing Test
 (IEC IP-code)

Insulation Resistance
 (@ 500 VDC)

O-rings

Dielectric Strength
DC Test Voltage

Base Material
Body Parts
Inner Conductor

Plating
Body Parts
Inner Conductor

Insulators

Test performed by
Date of release

Remarks

*All tests performed using instruments calibrated in accordance to our ISO 9001 certification.
 Further technical specifications and installation instructions can be obtained on request.*